



Organic Peroxide Producers
Safety Division

SAFETY AND HANDLING OF ORGANIC PEROXIDES

A Guide Prepared by the Organic Peroxide Producers Safety Division of the American Chemistry Council

The American Chemistry Council ([ACC](#)), formerly Chemical Manufacturers' Association, CMA, was founded in 1872, and is the oldest trade association of its kind, representing more than 190 companies engaged in all aspects of the business of chemistry in the United States.

The Organic Peroxide Producers Safety Division ([OPPSD](#)) of ACC was formed by organic peroxide producers in 2021 in order to promote the science, safety and handling of organic peroxides. This guide is part of the OPPSD's activities toward this goal.

Organic Peroxide Basics

An organic peroxide is any organic chemical that contains an oxygen-oxygen (-O-O-) bond (peroxy functional group). A very large number of compounds fit this definition and therefore organic peroxides may have a wide range of properties. This guide will only cover commercial organic peroxide formulations.

The peroxy functional group is thermally sensitive, containing a pseudo-stable energetic bond. For the organic peroxide to be useful as a free radical source, this bond must be broken. When properly used, these free radicals can initiate polymerization or other desired chemical reactions. This decomposition leads to heat and by-products.

Each organic peroxide has a different rate of decomposition. Some organic peroxides must be stored and shipped under refrigerated conditions to preserve their usefulness and quality and for safety reasons. Other organic peroxides can be stored and shipped safely at or above ambient temperature. In addition, some organic peroxides are shock or friction sensitive in their pure state. Determining the safe handling, storage and shipping temperatures is a significant part of the testing that must be done before an organic peroxide formulation is allowed to be transported or offered for sale.

TYPES OF ORGANIC PEROXIDES

The simplified formula for an organic peroxide is R_1OOR_2 where R_1 is an organic group and R_2 is the same or different organic group or hydrogen. In the case of difunctional peroxides (two peroxide bonds in the structure) the structure is simplified as shown for peroxyketals or dialkyl peroxides in the table below. In that case there may be three organic groups in the structure.



R_1 = organic group

R_2 = (same or different) group

Common types of commercially available organic peroxides and their typical ranges of 10 hour half-life temperatures are shown in the following table. Here the types are grouped by structural definition. Note that within each type, the exact structure of the various organic groups (R_1 , R_2 , or R_3) determines the thermal stability of any particular member. For some types, such as peroxydicarbonates, the nature of the organic groups has little effect on the thermal stability. For other types, like peroxyesters, the organic groups can have a dramatic effect on thermal stability. In the case of peroxyesters, you will see a wide range of 10 hour half-life temperatures as a result. In some of the types, one or more of the organic groups must be tertiary-alkyl groups in order for the peroxides to be good free radical initiators.

Common Types	Typical Formula	10 Hour Half-life Range (°C)
dialkyl peroxides	$R_1-O-O-R_2$	117–133
hydroperoxides	$R_1-O-O-H$	133–172
diacyl peroxides	$R_1-\overset{\overset{O}{ }}{C}-O-O-\overset{\overset{O}{ }}{C}-R_2$	20–75
peroxydicarbonates	$R_1-O-\overset{\overset{O}{ }}{C}-O-O-\overset{\overset{O}{ }}{C}-O-R_2$	49–51
peroxyesters	$R_2-O-O-\overset{\overset{O}{ }}{C}-R_1$	49–107
ketone peroxides	$H-O-O-\left(\begin{array}{c} R_1 \\ \\ -O-O- \\ \\ R_2 \end{array} \right)_n-H$	N/A
peroxyketals	$R_1-O-O-\overset{\overset{R_2}{ }}{C}-O-O-R_1$ R_3	92–115
alkylperoxy carbonates	$R_1-O-O-\overset{\overset{O}{ }}{C}-O-R_2$	90–100

R_1 and / or R_2 are generally alkyl groups, often tertiary-alkyl groups. If attached directly to the peroxy group, n is 1–3. One of the groups can be hydrogen.

CHARACTERISTIC PROPERTIES

For the organic peroxide to be useful, the peroxy bond must be broken, usually by heating, to produce free radicals which can initiate polymerization or another desired end-result. This decomposition also produces heat and by-products.



Each peroxy group is considered to contain one active oxygen atom. The concept of active oxygen content is useful for comparing the relative concentration of peroxy groups in formulations, which is related to the energy content. In general, energy content increases with active oxygen content and thus, the higher the molecular weight of the organic groups, the lower the energy content and, usually, the lower the hazard.

The term ACTIVE OXYGEN is used to specify the amount of peroxide present in any organic peroxide formulation. One of the oxygen atoms in each peroxide group is considered "active". The theoretical amount of active oxygen can be described by the following equation.

$$\text{AO Theoretical (\%)} = [(16 \cdot p)/m] \cdot 100$$

P = number of peroxide groups in the molecule

M = molecular weight of the pure peroxide

Organic peroxides are often sold as formulations which include one or more phlegmatizing agents. That is, for safety or performance benefits, the properties of an organic peroxide formulation are commonly modified by the use of additives to phlegmatize (desensitize), stabilize, or otherwise enhance the organic peroxide for commercial use. Commercial formulations occasionally consist of mixtures of organic peroxides which may or may not be phlegmatized.

Organic peroxides may be in the solid or liquid state. There are no organic peroxides in the vapor state. Occasionally, liquid organic peroxides are desensitized by mixing with solid materials so that the mixture behaves as if it is a solid.

THERMAL DECOMPOSITION






Unlike most other chemicals, the purpose of a peroxide is to decompose. In doing so, it generates useful radicals that can initiate polymerization to make polymers, modify polymers by grafting or visbreaking, or crosslink polymers to create a thermoset. When used for these purposes, the peroxide is highly diluted, so the heat generated by the exothermic decomposition is safely absorbed by the surrounding medium (e.g., polymer compound or emulsion). But when a peroxide is in a purer form, the heat evolved by its decomposition may not dissipate as quickly as it is generated, which can result in increasing temperature which further intensifies the rate of exothermic decomposition. This can create a dangerous situation known as a *self-accelerating decomposition*.

A self-accelerating decomposition occurs when the rate of peroxide decomposition is sufficient to generate heat at a faster rate than it can be dissipated to the environment. Temperature is the main factor in the rate of decomposition. The lowest temperature at which a packaged organic peroxide will undergo a self-accelerating decomposition within a week is defined as the self-

accelerating decomposition temperature (SADT). The SADT is an important consideration in the proper storage of organic peroxides and more detail is available in Appendix I.

The term half-life relates to the time for one half of the starting material to decompose at a given temperature. The half-life of an organic peroxide reveals its rate of decomposition at certain conditions and allows the behavior of various organic peroxides to be compared. The half-life of organic peroxides is an important aspect, and more detail is available in Appendix II.

Below is a chart of some commercial organic peroxides listing the respective SADT and the temperature at which the peroxides have a half-life of 10 hours.

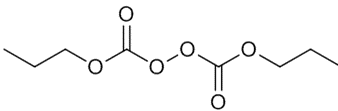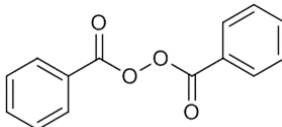Name	Typical Form	Structure	10 Hr Half Life (°C)	SADT (°C)
Di(n-propyl) peroxydicarbonate	Liquid with 40% diluent		50	-5
Dibenzoyl peroxide	Solid with 25% water		73	71
t-Butyl peroxybenzoate	Liquid neat		104	>60
Methyl ethyl ketone peroxide	Liquid with 60% diluent		N/A	63
2,5-Dimethyl-2,5-di(t-butylperoxy)-3-hexyne	Liquid with 15% diluent		131	>80

NOTE: MEKPs are used in promoted, chemical reactions which typically do not have half-life data.

CONTAMINATION AND PROMOTED DECOMPOSITION

In addition to thermally induced decomposition, organic peroxides can be induced to decompose by contaminants such as amines, metal ions (by themselves or as a result of contact with metal surfaces), strong acids and bases, and strong reducing and oxidizing agents. Susceptibility to decomposition due to contamination or contact varies greatly among different organic peroxide types and formulations. For example, organic peroxides that are particularly susceptible are hydroperoxides (those with the -O-O-H group). However, methyl ethyl ketone peroxides (MEKP's) are also typically more susceptible to decomposition initiated by contamination. Careful thought should be put into the selection of materials of construction for all storage and handling systems that may have organic peroxides introduced to them. Selection of gaskets and materials of all sealing elastomers should also be considered for compatibility with the organic peroxide and

possible solvent that might be used to introduce it into any chemical process. Although you should consider avoiding contact with most metals and metal salts, cobalt (Co), iron (Fe) and copper (Cu) can be particularly troublesome. Therefore, as a precaution, all equipment and transfer lines that routinely handle organic peroxides should be fabricated of 316 stainless steel.

In some cases, the use of this characteristic can be exploited through the intentional “contamination” of the organic peroxide to induce decomposition at a lower temperature than normal for a particular organic peroxide formulation. In these cases, the contaminant is referred to as a “Promoter”. Promoters allow organic peroxides to be used at lower temperatures than when simple thermal decomposition is the basis for decomposition. In those processes, low concentrations of peroxides are used. One must be careful in handling promoters around organic peroxide formulations that have not been diluted. Severe reactions may be caused by accidental contamination of the undiluted organic peroxide formulation with the promoter.

OXIDIZING PROPERTIES

While most organic peroxides exhibit weak oxidizing properties toward reducing agents, contrary to wide-spread belief, most organic peroxide formulations are fuels, not oxidizers. Only one type of organic peroxide, peroxy acids, shows strong oxidizing properties. The oxygen-oxygen bond only rarely decomposes to give free oxygen. It should be noted that organic peroxides and strong oxidizers are not compatible.

HAZARD IDENTIFICATION AND CLASSIFICATION

There are different hazard classification systems for organic peroxide formulations including transportation, storage and handling.

TRANSPORTATION

The transportation of organic peroxide formulations is strictly regulated. As a brief summary, the procedure for testing and classifying organic peroxide formulations for transportation that has been developed by the United Nations is adopted and used by the Pipeline and Hazardous Materials Safety Administration ([PHMSA](#)) of the US Department of Transportation. Organic peroxide formulations are tested according to this procedure and classified based on test results. Organic peroxide formulations are tested according to the UN Manual of Tests and Criteria and are classified from most hazardous to least hazardous. The classifications range from Type A, considered too hazardous to transport, to Type G, safe enough to be not regulated as an organic peroxide.

Once tested and approved for transportation by the authorities, an entry for the organic peroxide formulation is usually added to the table of approved organic peroxide formulations. The US table can be found in the Code of Federal Regulations ([49 CFR 173.225](#)) and the UN table can be found in the UN Recommendations on the Transport of Dangerous Goods—Model Regulations (also known as the [UN Orange Book](#)).

Transportation by sea or air is more restrictive than by road. Transportation by sea is regulated according to the International Maritime Dangerous Goods (IMDG) Code of the International Maritime Organization ([IMO](#)). The International Air Transport Association ([IATA](#)) is an industry trade association which regulates transportation by air, based on the UN International Civil Aviation Association (IACO) Technical Instructions for the Safe Transport of Dangerous Goods by Air.

STORAGE AND FIRE PROTECTION

Storage classification systems for organic peroxide formulations are different for each country. The various codes focus on the basic properties of the organic peroxide formulations. In general, the codes focus on the same characterization tests as used for transportation classification plus the burning rate using either small-scale burning or large-scale burning test data for liquid formulations or large scale for solid formulations. In Europe, the PGS-8 (Dutch) Code is often referenced for determination of storage classification. The Dutch Code is often utilized since it is available in English, and it has a reasonable amount of detail about the physics of the classification scheme. Additional details can also be found in the International Fire Code Standards, Chapter 62 in reference to organic peroxides.

Storage regulation in the US depends on the local Authority Having Jurisdiction (AHJ), usually the fire marshal. OPPSD assisted the National Fire Protection Association (NFPA) in developing a storage code for organic peroxide formulations. [NFPA 400](#) Hazardous Materials Code is the current edition covering organic peroxides. OPPSD remains active in the NFPA technical subcommittee responsible for maintenance and update of NFPA 400. It is a goal of the OPPSD to have all transported organic peroxide formulations listed with recommended storage classifications in NFPA 400 in the foreseeable future. Additionally, the OPPSD will advocate for storage classifications which are consistent across geographies. NFPA 400 offers two routes to follow for storage compliance. Chapter 14 contains prescriptive guidance, while Chapter 10 is the performance-oriented option.

It is absolutely essential that the characteristics and the particular conditions for the safe handling of each organic peroxide formulation are read and understood. The label, product bulletin and safety data sheet (SDS) are typically excellent sources of information. Consult the manufacturer, distributor or supplier for recommendations for safe use and storage.

Know the NFPA 400 hazard class and the properties associated with that class. These standards define safe storage and firefighting methods. The classification description given in NFPA 400, together with the fire hazard characteristics are described below. Classes are only for organic peroxide formulations in their original DOT shipping container. (The actual classifications are determined by transport class and small or large scale burning rate test results.)

“Class I” describes organic peroxides that are more severe than a Class II, but do not detonate and that are characterized as “explosive in package” or by a very fast burning rate, including those characterized for transport as Type B, those characterized for transport as Type C with a large-scale burning rate equal to or greater than 300 kg/min, and those characterized for transport as Type C with a small-scale burning rate greater than 9.0 kg/min x m² unless the large-scale burning rate is less than 300 kg/min.

"Class IIA" describes organic peroxide formulations that burn very rapidly and that present a severe reactivity hazard, and those characterized for transport as Type C with a large scale-burning rate greater than 140 kg/min but less than 300 kg/min, including those characterized as Type C, Type D, and Type E if the small-scale burning rate is greater than 2.2 kg/min x m².

"Class IIB" describes organic peroxide formulations that burn rapidly and that present a reactivity hazard, and those characterized for transport as Type C with a large scale-burning rate greater than 60 kg/min, those characterized for transport as Type E with a large-scale burning rate greater than 60 kg/min, and those characterized as Type C, Type D, and Type E if the small-scale burning rate is greater than 0.9 kg/min x m².

"Class III" describes organic peroxide formulations that burn rapidly and present a moderate reactivity hazard, including those characterized for transport at Type D with a large-scale burning rate equal to or greater than 10 kg/min but less than 60 kg/min, those characterized for transport as Type E with large-scale burning rate equal to or greater than 10 kg/min but less than 60 kg/min, those characterized for transport as Type F with a large-scale burning rate equal to or greater than 10 kg/min, and those characterized as Type D, Type E, and Type F if the small-scale burning rate is less than 0.9 kg/min x m².

"Class IV" describes organic peroxide formulations that burn in the same manner as ordinary combustibles and present minimal reactivity hazard, including those characterized for transport as Type E or Type F with large-scale burning rate less than 10 kg/min.

"Class V" describes organic peroxide formulations that burn with less intensity than ordinary combustibles or those that do not sustain combustion and present no reactivity hazard, and those characterized for transport as Type G without additional subsidiary risks.

Fire not only can originate from within the organic peroxides due to decomposition initiated by temperature or contamination, but it may spread to the organic peroxides from adjacent areas. Proper storage and use of mechanical devices can help prevent damage to surrounding areas from burning or decomposing organic peroxides. The recommendations in NFPA 400 should be followed. Keep organic peroxides well away from other combustible materials in their storage area, preferably isolating them by means of firewalls. If possible, store organic peroxides in a separate building at some distance from adjacent buildings. All areas of organic peroxide storage should be equipped with fire control systems, such as automatic sprinklers.

It is important to understand that when decomposition occurs some organic peroxide formulations release a considerable amount of gases and/or mists. Some, but not all, of these gases may be flammable. For example, carbon dioxide is a common, gaseous decomposition product for diacyl peroxides, peresters, and peroxydicarbonates that is not flammable. Flammable gases may include volatile organic compounds like methane, for example.

The decomposition may include small organic fragments, such as methane or acetone, which are flammable. When flammable gases or mists are released as part of the decomposition, there is always the potential danger of a fire or vapor phase explosion. Therefore, the risk of vapor phase

explosion should be kept in mind when designing storage structures. These types of materials may be released at low rates during storage and in quite high rates in the event of an upset due to failure to control storage temperature or in the event of a fire in the storage area.

When flammable gases or mists are released as part of the decomposition, there is always the potential danger of a fire or vapor phase explosion. Therefore, the risk of vapor phase explosion should be kept in mind when designing storage structures. These types of materials may be released at low rates during storage and in quite high rates in the event of an upset due to failure to control storage temperature or in the event of a fire in the storage area.

It is the ease of splitting the peroxy group to give two free radicals that makes organic peroxides so useful. However, the presence of energetic free radicals during decomposition, particularly in hot gases or mists, can cause auto-ignition to occur at a lower temperature than would otherwise be normal for a similar chemical structure without the peroxy functional group. Organic peroxides do not generally release oxygen as part of the decomposition, so there is little risk of enhanced burning rates due to oxygen enrichment. This is unlike the decomposition of hydrogen peroxide and solid oxidizers that can liberate oxygen.

The burning rate for an organic peroxide formulation is higher than for a similar composition without the peroxy functional group. This is the result of the energy liberated when the peroxy group decomposes, supplying heat to the burning organic peroxide in addition to the heat flux from the flame. In addition, the small fragments resulting from decomposition burn rapidly. As the temperature further increases, so does the rate of decomposition and heat release, further accelerating the burning rate. Some organic peroxides are formulated to absorb some of the heat of decomposition during burning, reducing the accelerating effect.

Water may be used to fight fires involving organic peroxides. The effectiveness of water in the control of fires in storage and work areas varies with the individual organic peroxide formulations. It is especially useful for those formulations that are heavier than water. Water is also useful in cooling areas not yet involved in a fire. When using hoses, spray or fog is most effective. For low boiling and low-density formulations, Aqueous Film-Forming Foam (AFFF) may be more effective than water alone. Remember that fire water may cause burning organic peroxide material to float on top of and flow with excess firefighting water. The runoff must be considered in the design of a firefighting approach.

Be aware that water can aggravate control of fires or cause decomposition of temperature-controlled organic peroxide formulations due to the warming of the organic peroxide by the water. With temperature-controlled organic peroxides, specialized fire control methods are required. Manual fighting of fires should be undertaken only with lower classed organic peroxides—consult NFPA 400 for additional information.

In some very special cases, dry chemical formulations may be effective, but may also be a problem with others. Always refer to the SDS for the most appropriate type of firefighting procedure for a particular organic peroxide formulation.

VAPOR PRESSURE

In the case of organic peroxides, vapor pressure determination is complicated. These may include flammable or combustible materials for phlegmatizing the formulation, in addition to one or more organic peroxide compounds. The typical methods for evaluation of vapor pressure as a function of temperature eventually fail – as the temperature is raised, the rate of decomposition increases, and eventually it is the vapor pressure of the decomposition products that is measured versus that of the components that are included in the formulations.

The investigation and interpretation of vapor pressure must be done with care, considering the decomposition characteristics of the organic peroxide(s) in the formulation. The temperature span as well as the time of the testing must be limited to minimize decomposition products from interfering with the test.

VAPOR DENSITY

Vapor density normally considers the molecular weight of the compound(s) to aid in determining whether the vapors will be heavier or lighter than air. The vapor density indicates where the vapors may accumulate if they are not confined. Since there is potential for decomposition vapors to be included in the vapor space due to organic peroxides undergoing decomposition, the accumulation of vapors may be unlike what would be predicted based on the molecular weight of the formulation components.

CONDUCTIVITY AND ELECTROSTATIC ACCUMULATION CONCERNS

Organic peroxide formulations may be very low in electrical conductivity – this implies that a significant electrostatic accumulation may occur, especially if the system is insufficiently grounded, the flow rate is high, or certain elements (such as filters) are included in the transfer system. Special care must be taken when designing organic peroxide transfer systems.

Routine evaluation of quality of grounding is recommended, and automatic alarm or shutdown systems may be appropriate for certain formulations and/or system designs. This is important since the formulation may be handled at a temperature above the flash point, or ignitable vapors could be in the area and could be ignited by an electrostatic discharge caused by the organic peroxide formulation handling system. Please refer to Section 11, Chapter 6, “Control of Electrostatic Ignition Sources” in NFPA 400 for additional guidance.

RECEIVING PROTOCOL

Organic peroxide formulations are packaged and shipped as per the appropriate regulating agencies. In all cases, it is important that the user know the recommended storage temperature(s) of the organic peroxide formulation(s) of interest. The maximum ($T_s \text{ max}$) and sometimes minimum ($T_s \text{ min}$) storage temperatures for the product(s) can always be found in Section 7 of the SDS. The user should also be familiar with the control and emergency temperature (T_c & T_e) and the SADT.

The T_c is derived from the SADT and is the maximum temperature at which the formulation can be safely transported. A T_c is not required if the SADT is greater than 50°C. The T_e is also derived from the SADT and is the temperature at which emergency procedures must be implemented.

Prior to securing and using an organic peroxide formulation, a prospective user should have knowledge of the characteristics of the organic peroxide formulation(s) of interest and have procedures in place for dealing with a possible emergency.

When product is delivered, it should be immediately moved to a storage area that meets the temperature requirements and NFPA storage recommendations of the organic peroxide formulation. A refrigerated organic peroxide formulation should never be allowed to be left in a receiving area for any extended period of time. Along with the user, it is critical that all personnel involved in the process of receiving, handling and storing the organic peroxide formulation be familiar with its properties and storage temperature requirements.

TEMPERATURE CONTROL

No single parameter is as important as the control of the temperature. Whether shipping, handling or storing, if the temperature is maintained well below its SADT, most hazards can be avoided. For storage over a longer period of time, the manufacturer's recommended temperature range for storage should be rigorously followed. It should also be noted since decomposition temperatures are time dependent, temperatures higher than the shipping temperature can be tolerated for short periods during handling and use. **In summary, proper temperature control is important to prevent run-away decompositions, evolution of gases and mists (that may lead to vapor phase explosions), auto-ignition or loss of product quality.**

The maximum possible transport temperature, also known as "Control Temperature", is dependent on the SADT and is determined as follows:

$$T_c = \text{Control Temperature} = \text{SADT} \text{ minus } 20^\circ\text{C} \text{ if } \text{SADT} \leq 20^\circ\text{C}$$

$$T_c = \text{Control Temperature} = \text{SADT} \text{ minus } 15^\circ\text{C} \text{ if } \text{SADT} > 20^\circ\text{C}, \leq 35^\circ\text{C}$$

$$T_c = \text{Control Temperature} = \text{SADT} \text{ minus } 10^\circ\text{C} \text{ if } \text{SADT} > 35^\circ\text{C}, \leq 50^\circ\text{C}$$

$$T_c = \text{Control Temperature} \text{ is not required if } \text{SADT} > 50^\circ\text{C}.$$

The Control Temperature is the maximum temperature that the organic peroxide can be safely transported. It is also commonly used as the alarm temperature. The Control Temperature is supplemented by an "Emergency Temperature" which is higher than the Control Temperature, but still well below the SADT. The Control Temperature may be exceeded if maintenance is necessary or until alternative cooling (e.g., dry ice or wet ice) is available. However, if the Emergency Temperature is reached, immediate steps must be taken. Remove personnel from the area and if possible, safely cool down. Properly dispose of the organic peroxides if necessary.

Often, the recommended storage or transportation temperature is lower than the control temperature, not for safety but for quality; the lower temperature will minimize the active oxygen loss and by-product formation due to gradual decomposition. On the other hand, some liquid or paste organic peroxides must be stored above a certain minimum temperature as turbidity, phase separation, crystal deposits or solidification can occur. The most serious situation is if the organic peroxide is separated from the diluent due to phase separation while frozen. The recommended temperature range for storage can be found on each organic peroxide package and in the corresponding technical literature or SDS.

CONTAMINATION CONTROL

Contamination can lead to rapid decomposition and similar problems to those associated with lack of temperature control. Decomposition due to contamination may happen very rapidly and result in catastrophic results. Susceptibility of organic peroxides to induced decomposition from contamination varies greatly between the types of organic peroxides and the specific contaminants. Nevertheless, contamination has been a major source of accidents from run-away decompositions, particularly during handling and use. Especially sensitive are the ketone peroxides, hydroperoxides, peroxyketals, and some diacyl peroxides. The contaminants most often causing problems have been redox agents, such as cobalt salts and other accelerators and promoters, as well as various metal ions and ionizing acids, such as high concentrations of sulfuric acid. Strong oxidizing and reducing agents can also cause decompositions.

To avoid problems from contamination, never return unused organic peroxides to the original container. Use only scrupulously clean equipment and make certain that all materials that the organic peroxide comes in contact with are compatible, especially if equipment (such as pumps) is used for multiple services. In general, preferred materials of construction are stainless steel (316 preferred), PTFE or glass linings. Do NOT use copper, brass or iron. When a diluent is used, the selection of a diluent and its purity must be strictly controlled. Contact your supplier for recommendations. Also be cognizant of compatibility with wetted seals and o-rings in equipment that will come in contact with the organic peroxide formulation.

While it is a good practice in any situation, especially where a reactive diluent is employed, a general blending rule is to add the organic peroxide to a resin or monomer, not the reverse. Never add organic peroxides to hot diluents. Care must be taken when adding organic peroxide formulations to processes, such as extrusion, at elevated temperature. When reactive materials, such as styrene, are employed as diluents (or solvents), strictly adhere to temperature controls and venting requirements because of potential heating due to polymerization.

The effectiveness of diluents, used as a phlegmatizer or desensitizer, is due in part to the reduction in energy level by dilution and due to energy absorption. They may also act as a mild chain stopper since most decompositions proceed via a chain mechanism.

For contamination problems from absorbents used during spills, please see OPPSD article, "Selection of Absorbents for Spills of Liquid Organic Peroxide Formulations".

CONFINEMENT CONTROL

If rapid decomposition is initiated, confinement of an organic peroxide formulation may greatly accelerate the rate of its decomposition. With the higher storage classes, transition from a manageable decomposition to a higher order event can occur, which ordinary venting may not control. When it is necessary to confine high-energy organic peroxides by more than the confinement provided by the DOT shipping container, dilution of the peroxide is usually required. See diluents under "Contamination Control".

In some manufacturing operations, it may be necessary or desirable to use containers, pumping systems and piping to deliver or handle the organic peroxide being used at processing areas or workstations. If the organic peroxide is not diluted and the system provides confinement beyond that of the shipping container, then the quantities must be kept to the very minimum and sufficient venting provided to prevent pressure build up. Employ good engineering practices and techniques of process safety management to control risk from various scenarios (see Appendix A of 29 CFR 1910.119— Process safety management of highly hazardous chemicals).

Vent sizing for organic peroxides is a difficult task and can be accomplished by several methods including Design Institute for Emergency Relief Systems (DIERS), United Nations Appendix 5, and the "OPPSD/PLASTICS Methodology". The DIERS vent sizing method is based on data obtained from small scale adiabatic calorimetry while the UN and OPPSD/PLASTICS methods test the venting of the organic peroxide on larger scale (10 liters).

In particular, protect against blocking organic peroxide in lines that cannot be drained of organic peroxide after its use. This can result in decomposition under confinement leading to the possibility of a line rupture and ensuing shrapnel.

QUANTITY CONTROL

Due to the potential for dangerous decompositions caused by thermal reaction, contamination, or coincident events like fire, the quantity of organic peroxide in storage should be controlled. This is one of many methods to mitigate the risk. For example, some organic peroxides are specifically listed in national regulations like the US Process Safety Management laws (see Appendix A of 29 CFR 1910.119—Process safety management of highly hazardous chemicals).

The quantity limitations for safe storage of organic peroxides may be understood by reviewing guidelines authored by standard bodies or insurance advisory associations. For example, in the United States, the authorities having jurisdiction often utilize the National Fire Protection Association (NFPA) code 400. The topic of organic peroxide storage is covered in Chapter 14. In other parts of the world, guidelines like the Dutch Code may be consulted. This guideline is referred to as PGS8.

There are several reasons to control inventory. In the event of fire, the potential duration of the fire is limited. The amount of fire protection water to be applied in controlling the fire is limited as well; this is important to avoid large catch basins. The larger the inventory, the more separation.

distance that may be required from the storage area and the more risk for explosion due to vapor phase by-product ignition

The inventory limits for organic peroxide, therefore, must take into account whether or not automatic fire fighting system is applied, the separation of the storage area from other areas, the hazard classification of the formulations to be stored, and other aspects of the building design. The insurance company or corporate policy may also impose limits.

QUALITY CONTROL

Assay (active oxygen content) can best be preserved by following proper storage guidelines. Always store peroxides at proper temperature and rotate stock to ensure minimal time in storage. The supplier's literature should provide a standard shelf-life period for storage at prescribed conditions. If in doubt about the quality of materials due to any storage conditions, contact the supplier for help in testing the formulations before using them.

To avoid quality issues, organic peroxide users should consider implementing a form of inventory control to ensure stock is used in a timely fashion and in the order of the date of manufacture. This can be as simple as the method of stocking of your newer peroxides behind the older peroxides. Some users go as far as to use of computer-based inventory management. If there is a question on the date of manufacture, contact the supplier of organic peroxide. Most manufacturers use lot numbers on each container from which the manufacturer could provide manufacturing dates.

SPILL CLEAN UP

Spills can result in a host of problems. Potential hazards are:

- Fire (organic peroxides formulations may contain flammable solids and / or combustible liquids)
- Decomposition (due to either increased temperature or contamination)
- Evaporation of a safety diluent (either because the diluent is volatile at ambient temperature, or because the spill involved a hot surface)
- Increased worker exposure (peroxide formulations, especially hydroperoxides and ketone peroxides, can be strong irritants)
- Incorrect choice of absorbent material and/or methods

Know what action is recommended by the manufacturer for each specific formulation that is used. Cleaning up a spilled organic peroxide formulation may not present a serious problem, or considerable time may elapse before a serious problem develops. On the other hand, decomposition may occur within a short time period, so take precautions accordingly. Rapid and proper action may be required; this is normally the best procedure in order to avoid

decomposition or a fire. With flammable liquids and solids, the problem is immediate. Many organic peroxide formulations are difficult to ignite but burn vigorously once ignited.

In many cases, dilution with a compatible inert solid absorbent followed by wetting with water is very effective. Dilution with a compatible high boiling organic liquid prior to absorption is often effective and desirable especially with the more energetic or flammable formulations. Caution: absorbents often have high surface areas which may catalyze decomposition as well as contain catalyzing impurities. Special care must be used when water wetted solids are spilled. Avoid drying out by wetting down spilled material immediately.

Use the SDS and manufacturer's technical brochures, if available, to prepare for proper action in the event of a spill. Have appropriate Personal Protective Equipment (PPE), firefighting equipment, absorbents, diluents, clean-up tools (non-sparking), and other emergency supplies available in all areas where organic peroxides are handled or stored.

Standard precautions should be taken when handling waste from an organic peroxide spill. In addition, special precautions should be taken to prevent a subsequent decomposition due to contamination or heat. After clean up, waste should be removed from work and storage areas and isolated for further emergency treatment and prompt disposal. Do not store in tightly sealed closed containers. Permit venting of further decomposition products. See the links to OPPSD's spill clean up bulletins in the next section.

DISPOSAL OF WASTES

Disposal of wastes after the clean-up of an organic peroxide spill or from container leakage can present possible challenges. This material should not be reused. It is beyond the scope of this Guide to address all aspects of waste disposal due to the continual changes in the Federal and State regulations that govern waste disposal. Consult the SDS and available manufacturers' literature for information regarding proper disposal. Workers involved in handling, dispensing and spill clean-up should be reminded of the potential hazards that some formulations may present from decomposition due to contamination or exposure to heat. The OPPSD offers the following documents that provide helpful information regarding waste disposal and spill clean-up:

[Organic Peroxide Spill Clean Up](#)

[Disposal of Liquid Organic Peroxides](#)

[Disposal of Solid Organic Peroxides](#)

[Disposal of MEKP \(Methyl Ethyl Ketone Peroxide\)](#)

[Container Disposal](#)

[Selection of Absorbents for Spills of Liquid Organic Peroxide Formulations](#)

Appendix I

SELF-ACCELERATING DECOMPOSITION TEMPERATURE (SADT) AND RAPID HEAT DECOMPOSITION TEMPERATURE (RHDT)

A self-accelerating decomposition occurs when the rate of peroxide decomposition is sufficient to generate heat at a faster rate than it can be dissipated to the environment. Temperature is the main factor in determining the decomposition rate, although the size of the package is also important since its dimensions will determine the ability to dissipate heat to the environment.

All peroxides contain an oxygen-oxygen bond that, on heating, can break apart homolytically to generate two radicals. As mentioned previously, this decomposition also generates heat. But the stability of the oxygen-oxygen bond is dependent on what else is present in the molecule. Some peroxides, due to their chemical make-up, are very unstable and need to be refrigerated to avoid a self-accelerating decomposition. Others, particularly those used for crosslinking purposes, are much more stable and can be stored at normal ambient temperatures without risk of self-acceleration. Due to the large variations in the stabilities of peroxides, each is tested to determine the safe maximum temperature for which the peroxide may be stored, shipped, and handled. The result of this test is the self-accelerating decomposition temperature (SADT).

The SADT is the lowest temperature at which the tested package size will undergo a self-accelerating decomposition within one week. The SADT is the point at which the heat evolution from the decomposition reaction and the heat removal rate from the package of interest become unbalanced. When the heat removal is too low, the temperature in the package increases and the rate of decomposition increases in an uncontrollable manner. The result is therefore dependent on the formulation and the package characteristics.

The SADT for an organic peroxide formulation is usually lower for more concentrated formulations. Dilution with a compatible, high boiling point diluent will usually increase the SADT since the peroxide is dilute and the diluent can absorb much of the heat minimizing the increase in temperature. Also, for an organic peroxide formulation, larger packages generally have a lower SADT because of the poorer heat transfer of the larger package due to lower surface area to volume ratio.

Most organic peroxides react to some extent with their decomposition products during thermal decomposition. This often increases the rate since the decomposition proceeds more rapidly as the decomposition products are generated.

Appendix I

The SADT measurement is made as follows:

- The package containing the peroxide is placed in oven set for test temperature
- The timer starts when product reaches 2°C below intended test temperature
- The oven is held at constant temperature for up to one week or, until a runaway event occurs. Test "Passes" if product does not exceed test (oven) temperature by 6°C within one week Test "Fails" if product exceeds test temperature by 6°C within one week
- The test is repeated in 5°C increments until a failure is reached
- Fail temperature is reported as SADT for that package and formulation
- Secondary information about the violence of the decomposition can also be recorded

As an alternative to the oven test, the SADT for larger packages can be determined by substituting a Dewar flask for the package. The heat transfer of the Dewar flask can be matched to the heat transfer of a larger package size. This test is called the Heat Accumulation Storage Test (HAST) and can be referenced in the UN Manual, Tests & Criteria in Part II, Section 28, Test Series H.

Results of Self-Accelerating Decomposition

When thermal decomposition occurs, some organic peroxide formulations release a considerable amount of gases and/ or mists. Some, but not all, of these gases may be flammable. For example, carbon dioxide is a common, gaseous decomposition product for diacyl peroxides and peresters that is not flammable.

The decomposition may include small organic fragments such as methane or acetone which are flammable. When flammable gases or mists are released as part of the decomposition, there is always the potential danger of a fire or vapor phase explosion. Therefore, the risk of vapor phase explosion should be kept in mind when designing storage structures. These types of materials may be released at low rates during storage and in quite high rates in the event of an upset due to failure to control storage temperature or in the event of a fire in the storage area.

It is the ease of splitting the peroxy group to give two free radicals that makes organic peroxides so useful. However, the presence of energetic free radicals during decomposition, particularly in hot gases or mists, can cause auto-ignition to occur at a lower temperature than would otherwise be normal for a similar chemical structure without the peroxy functional group. Organic peroxides do not generally release oxygen as part of the decomposition so there is little risk of enhanced burning rates due to oxygen enrichment. This is unlike the decomposition of hydrogen peroxide and solid oxidizers that can liberate oxygen.

Appendix I

Rapid Heat Decomposition Temperature (RHDT)

The Rapid Heat Decomposition Temperature (RHDT) is the temperature at which an organic peroxide formulation visibly decomposes when heated rapidly. The RHDT is determined by heating a one gram sample of organic peroxide formulation and a one gram sample of mineral oil in separate containers at 4°C / minute. When the organic peroxide formulation visibly decomposes the temperature of the mineral oil is reported as the RHDT.

Appendix II

HALF-LIFE OF ORGANIC PEROXIDES

Half-life is the time and temperature at which 50% of the peroxide will decompose. Half-life is usually reported for dilute organic peroxide solutions in order to simulate half-life at normal use levels. The half-life time is the time at which 50% of the peroxide has decomposed at a specified temperature. The half-life temperature is the temperature at which 50% of the peroxide has decomposed at a specified time. Organic peroxide half-life temperature is usually reported for 0.1 hour, 1 hour, and 10 hour periods. This is useful for application considerations but is of limited use for safety assessment.

GENERAL BACKGROUND ON HALF-LIFE OF ORGANIC PEROXIDES

Due to the instability of the O-O bond(s) found in all peroxy compounds they decompose into free radicals under the influence of heat. As the temperature increases, vibrational energy increases until eventually it exceeds the O-O bond strength and the molecules start to split into two (or more) free radicals. The rate of this decomposition reaction is described by the term "half-life". This characteristic value, which is mostly temperature-dependent, is one of the most important factors for selecting a suitable initiator to provide reactive benefits.

In general, the term half-life relates to the time for one half of the starting material to decompose at a given temperature. Conversely one can specify the time for one half of the material to decompose and the associated temperature can be determined.

This concept is similar to the decomposition of radioactive materials, since it is described by the same mathematical equations, but it has nothing to do with decomposition of radioactive materials.

Theoretical Considerations

The rate of decomposition of a peroxide compound at a certain temperature largely determines its suitability for a specific useful application. To make a polymerization reaction economical the rate of free radical generation must be reasonable, so it is important to understand the parameters that might influence the half-life of compounds under consideration.

The half-life of a peroxide reveals its rate of decomposition at a certain temperature and allows the behavior of various peroxide compounds to be compared. The half-life indicates the time when half of the quantity of peroxide originally present has decomposed. The amount of the peroxide compound remaining after successive half-life periods, compared to the starting amount, may be understood by looking at the power function.

The portion of the organic peroxide consumed after a given number of half-life periods is given by the following equation:

$$\frac{c_n}{c_i} = 1 - \left(\frac{1}{2}\right)^n$$

where, C_n is the concentration after n half-life periods

C_i is the concentration at the start of the reaction

n is the number of half-life periods


Appendix II

The concentration, relative to the starting point and percent of the starting material decomposed after n half-life periods can be seen in the following table:

Time <i>in half-life units</i>	Concentration <i>in relation to starting point</i>	Amount Decomposed <i>in relation to starting point</i>
0	100%	0%
1	50%	50%
2	25%	75%
3	12.5%	87.5%
4	6.3%	93.8%
5	3.1%	96.9%
6	1.6%	98.4%
7	0.8%	99.2%
8	0.4%	99.6%
9	0.2%	99.8%
10	0.1%	99.9%

It is easy to see that after three half-life periods the organic peroxide will be significantly decomposed and after ten periods it will be essentially totally consumed.

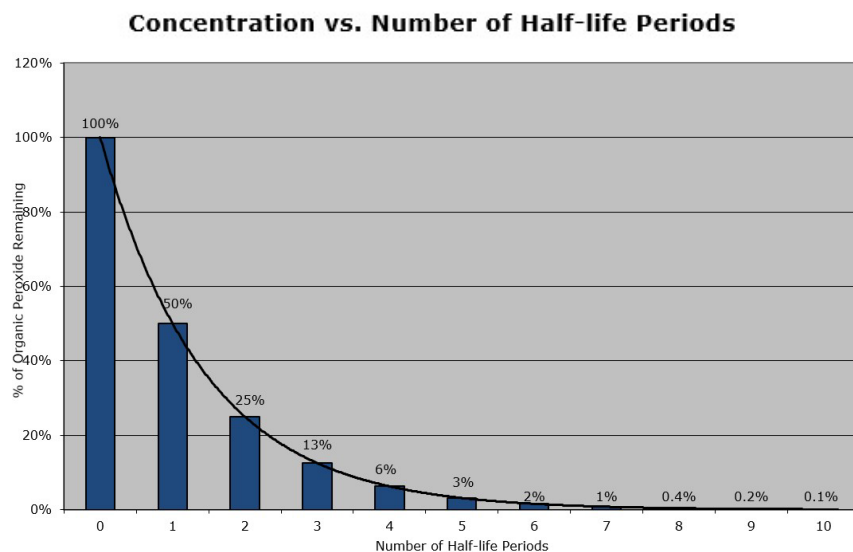In graphical format the characteristic decline in concentration is shown in this image:




Appendix II

Faster decomposition rates due to increased temperature mean a shorter time is required for half of the starting organic peroxide to decompose. The thermal stability of organic peroxides is frequently characterized by giving the temperatures at which the half-life of the material is 10 hours, 1 hour, and 0.1 hour (6 minutes). One can talk about half-life time or half-life temperature where the other principle parameter has been clarified. To clarify, one can consider the example of tertiary- butyl peroxybenzoate which has the following characteristics in a specific solvent.


Compound:	Tertiary-butyl Peroxybenzoate
10 hours half-life:	104 °C
1 hour half-life:	124 °C
0.1 hour (6 minutes half-life):	165 °C

Given these concepts, the two following plots each represent the compound's behavior:

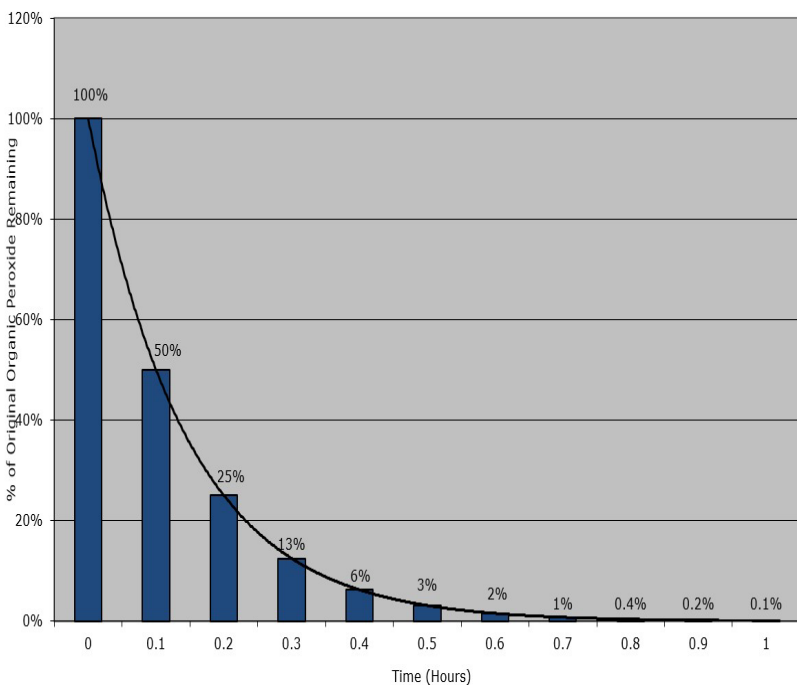Half-life Decay for Tertiary-butyl Peroxybenzoate at 165° C (0.1 Hour Half-life Temperature)



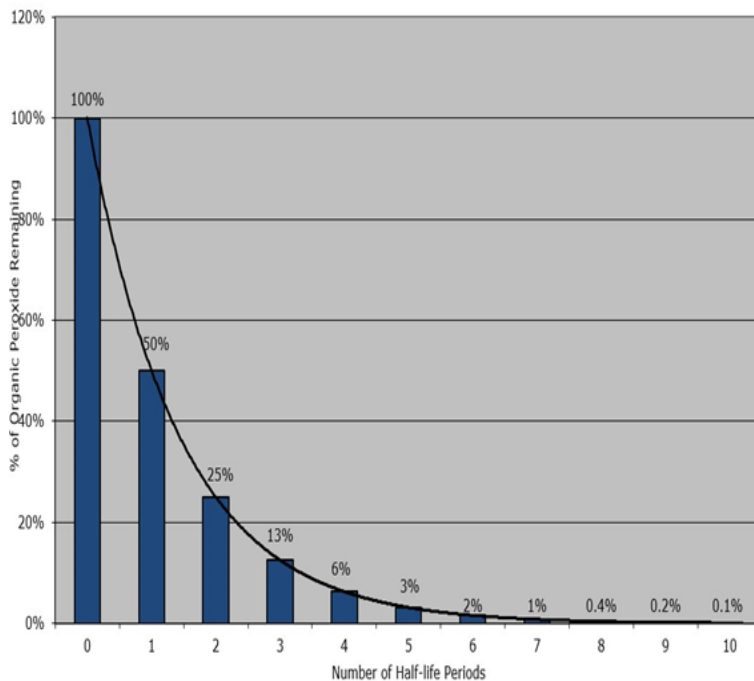Half-life Decay for Tertiary-butyl Peroxybenzoate at 124° C (0.1 Hour Half-life Temperature)



Appendix II

Mathematical Basis

The thermal decomposition of organic peroxides in the gas phase (such as experienced in polymerization of some olefins) or in an inert solvent (i.e., a solvent which does not affect the decomposition reaction) takes place according to first order kinetics. First order kinetics means that the decrease in the peroxide concentration with respect to time is proportional to the amount of residual peroxide present. Equation 1 is the starting equation to describe the behavior of first order decomposition.

$$\text{Equation 1} \quad -\frac{dc}{dt} = k \times c$$

Where, c = concentration

t = time

k = a reaction constant

By separating the variables and integration, as shown in equations 2 and 3, equation 4 is obtained.

$$\text{Equation 2} \quad \frac{dc}{c} = -k \times dt$$

$$\text{Equation 3} \quad \int_{c_0}^{c_t} \frac{dc}{c} = -k \int_0^t dt$$

$$\text{Equation 4} \quad \ln\left(\frac{C_t}{C_0}\right) = -k \times t$$

The reaction time (t) is derived from equation 4, giving equation 5;

$$\text{Equation 5} \quad t = \ln\left(\frac{c_0}{c_t}\right)/k$$

Ultimately equation 6 gives the half-life time where $t_{1/2}$ is the half-life time, since $c_t = c_0/2$, according to the half-life definition.

$$\text{Equation 6} \quad t_{1/2} = \ln 2/k$$

Equation 4 is useful for calculating the velocity constant (k) and the half-life. The concentration of peroxide at a given time (C_t) is measured at various intervals (t_1, t_2, t_3 , etc.) at a given temperature. The relative concentration (C_t/C_0) is plotted on a common logarithmic scale against the reaction time (t) on a linear scale. In such a diagram, the individual points should give a straight line with the gradient ($-k/2.3$). This can be used to read off the half-life at the point ($C_t/C_0 = 0.5$).

Temperature Dependence of Half-Life

The rate of reaction and consequently the velocity constant (k) are temperature-dependent. This is expressed by equation 7, where k_{\max} represents the maximum velocity constant at the maximum rate of reaction, E_A is the energy of activation for the decomposition of the peroxide concerned, R is the general gas constant and T is the absolute temperature.

$$\text{Equation 7} \quad k = k_{\max} \times e^{-E_A/R \times T}$$

Appendix II

Replace the velocity constant in equation 6 by the corresponding Arrhenius expression to obtain equation 8. The logarithmic form is given in equation 9 or 10. This indicates the connection between the half-life ($t_{1/2}$) and the temperature, T.

$$\text{Equation 8} \quad t_{1/2} = (\ln 2/k_{\max}) \times e^{-E_A/R \times T}$$

$$\text{Equation 9} \quad \ln(t_{1/2}) = \ln(\ln 2/k_{\max}) + E_A/R \times T$$

$$\text{Equation 10} \quad \ln(t_{1/2}) = \text{const.} + E_A/R \times T$$

where, k = velocity constant

E_A = Energy of activation

R = general gas constant

T = absolute temperature

A common logarithmic plot of the half-life at various temperatures against the reciprocal of the absolute temperature ($1/T$) will give a straight line with the gradient ($E_A/2.3 R$).

The activation energy of organic peroxides is in the region of approximately 100 to 150 (kJ/mol). When peroxides have low energy of activation, they decompose at a more uniform rate over a wide temperature range. Therefore, organic peroxides with low activation energy are more suitable for polymerization reactions that can be carried out in temperature stages. When peroxides have a relatively high activation energy, there will be a strong increase in the rate of decomposition with small increase in temperature. This character is good when the peroxide is to be incorporated into a reaction mixture at elevated temperatures (120°–140°C) without scorch, and then act as a source of free radicals after a slight increase in temperature.

PEROXIDE DECOMPOSITION IN PRACTICE

The theoretical derivation of the half-life of organic peroxides is made on the basis that they decompose via first order kinetics. This approximation only applies in ideal cases. Besides temperature and pressure, other parameters influence the decomposition rate. Those parameters include peroxide concentration, the specific solvent and reactive contaminants.

Decomposition can occur when the peroxide molecules are split, not only by the thermal energy causing the O-O bond to break due to vibration energy, but also by the attack of free radicals originating from the peroxide or from free radicals formed from the solvent. For these reasons, half-life determinations are usually carried out in relatively inert solvents, such as benzene or cumene, in concentrations of 0.1 to 0.2 molar (moles/liter) where concentration is low and polarity is low.

In summary, half-lives of various organic peroxides can only be regarded as fully characterized when one specifies the temperature, pressure, solvent, and the peroxide concentration.

Appendix II

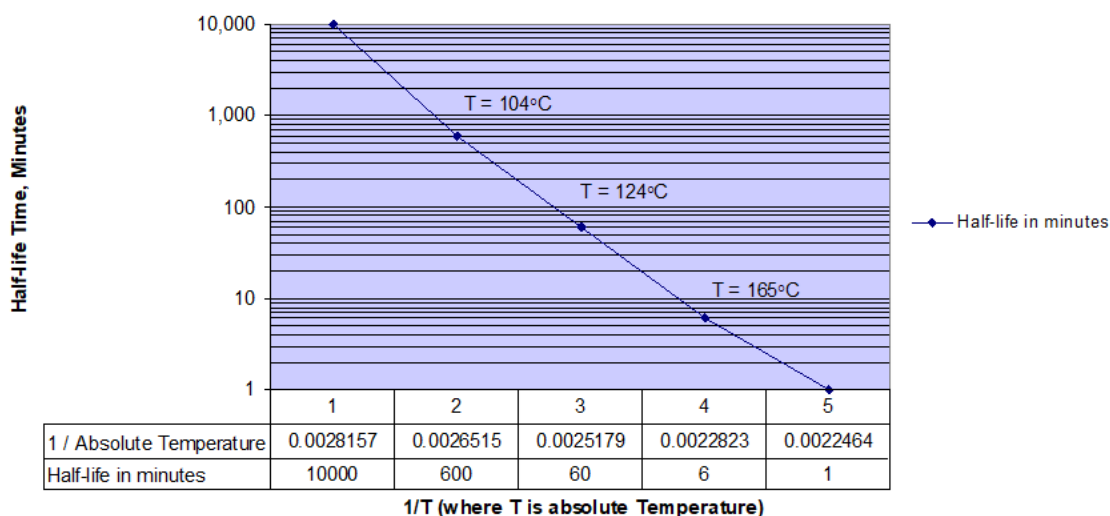
Effect of Temperature

The half-lives of all the main commercially available organic peroxides are measured by testing done at various temperatures. They are usually tested at 0.1 molar in benzene.

The temperatures are typically selected so that half-lives are expected to be 1 to 20 hours. Determination of longer half-lives is very time consuming, and the determination of shorter half-lives would not be sufficiently accurate because of rapid changes during the analysis.

The results of empirical determinations are used to develop the characteristic data for the peroxides. By use of equations above or by graphical methods, the half-life is determined. When graphical methods are used the half-life at 10 hours, 1 hour, and 1 minute are extrapolated. The energy of activation EA (kJ/mol) is also given.

Half-life versus Inverse Absolute Temperature for tertiarybutyl Peroxybenzoate



Commercial producers of organic peroxides will supply plots of half-life of a wide variety of peroxides for comparison of various materials. These diagrams show that the half-life lines are nearly parallel, meaning that they have similar activation energies.

Effect of Solvent

In trichloroethylene, the primary radicals from peroxide decomposition interact with the solvent, and subsequently only unreactive secondary radicals are formed. Correspondingly longer half-lives result, particularly with diacyl peroxides and peroxydicarbonates. Peresters are less affected by induced decomposition, so they show much smaller differences between solvents.

Testing with an unsaturated solvent can give an apparent increase of the half-life.

The type of solvent used, and particularly its polarity, plays an important part in the experimental determination of the half-lives. Some peroxides can be attacked and split directly by certain

Appendix II

solvents. It is also possible for primary radicals formed during peroxide decomposition to attack some solvents to form secondary radicals which, in turn, can split undecomposed peroxide molecules.

As a result of this "induced decomposition" the half-life is considerably shorter than the pure thermal decomposition would predict.

In polar solvents such as chlorobenzene or acetophenone, the half-lives are consequently much shorter than in non-polar solvents such as isododecane or benzene.

Effect of Peroxide Concentration

As mentioned earlier, organic peroxides should be regarded to decompose according to first order kinetics only when highly diluted. When testing with high peroxide concentration, there is a greater likelihood of induced decomposition. Primary radicals attack and split the remaining intact peroxide molecules. As a result, the rate of decomposition increases while the radical yield decreases as a result of radicals being consumed in this reaction.

The typical process conditions for peroxide initiated reactions involves low peroxide concentration and high concentration of reactive chemicals, so this also implies that low concentration testing is a correct approach for use in process design considerations.

Effect of Pressure

The rate of reaction and consequently the velocity constant depend on the pressure as well as the temperature. The normal explanation is that the O-O bond stretches in the transition state immediately before splitting. Higher pressures make the stretching of the bond more difficult. This is the so-called "activation volume" adjustment. Higher pressure therefore reduces the rate of decomposition compared to lower pressure. As a result, the half-life time increases. Temperature has a much greater influence on the half-life than pressure, in most cases.

For example, the half-life of an organic peroxide is approximately twice as long at a pressure of 3000 bar compared to atmospheric pressure. These pressures are only used in high pressure polymerization reactions like Low Density Polyethylene. In comparison, the half-life is doubled when the temperature is reduced by approximately 5-10°C.

Effect of Other Reactants

The presence of accelerators, e.g., metal salts of cobalt, iron or vanadium, and of tertiary aromatic amines or other reducing agents, such as ascorbic acid, and sulfites, changes the order of reaction and substantially reduces the energy of activation required. The use of thermally stable hydroperoxides in combination with alkali metal sulfites in low temperature (approximately 5°C) emulsion polymerization illustrates this point.

Organic peroxides in combination with accelerators are also used for curing unsaturated polyester resins at temperatures below 100°C. In these cases, it is possible to measure the decrease in the

Appendix II

peroxide concentration as a function of the reaction time and, thus, to determine the time at which the peroxide concentration has decreased to half the initial concentration. However, such measured values are not comparable with the half-life described and defined here, since they do not follow a simple, easy recognizable law. It is not possible to use either the first order decomposition reaction as a time function or the Arrhenius equation as a temperature function for this purpose.

DETERMINATION OF THE HALF-LIFE

A dilute solution of the organic peroxide to be examined must first be prepared. Where possible, the solvent used should consist of a non-polar substance which does not promote induced decomposition. In most cases, benzene is used. The peroxide concentration is kept low, usually below 0.2 mol/l. Since the accuracy of the analytical method is limited, an initial concentration of approximately 0.1 mol/l is generally recommended.

The peroxide solution is introduced into a number of test tubes or ampoules which are sealed and stored in a thermostatted bath at the measuring temperature until at least 75% of the original peroxide has decomposed. At specific time intervals (such as 1 hour, 2 hours, 4 hours, 6 hours, 8 hours), one sample is removed from the bath, cooled as rapidly as possible, and examined for its residual peroxide content. Chemical or physical methods can be used for this purpose. The Iodometric method of determination is generally used, although this must be adjusted to the peroxide concerned.

A graphical presentation is generally recommended, since this is the simplest method and compensates for some of the inaccuracies of the individual points of measurement. The relative concentration is plotted on a logarithmic scale against the reaction time (t) on a linear scale. By connecting the points in the graph to give a line, the half-lives can be read off from the ordinate ($c_t/c_0=0.5$).

If the correlation between the temperature and the half-life is to be determined, the same determination is carried out repeatedly at 2–3 different temperatures in stages of approximately 5–15 °C. The test temperatures are chosen so that the resulting half-lives are in the region of approximately 1–20 hours. If the half-lives are shorter, the error of measurement increases, and with longer half-lives, the task of sampling becomes excessive. Consequently, only a limited temperature difference, namely maximum 20–30 °C, can be determined with this limited time interval.

Most appropriately, the measured results can be represented on a graph by plotting the half-lives in hours or minutes as a function of the temperature in °C. A common logarithmic scale must be used for the half-life (ordinate) and the scale of inverse temperature for the other axis. In this way a straight line will be obtained from which the activation energy and the half-life for other temperatures not measured can be determined.

Definitions and Notations

ACC: The American Chemistry Council

Active Oxygen (AO) (also called Available Oxygen): the amount of oxygen contained in an organic peroxide molecule that is available for forming free radicals. This is presented as the percentage by weight of one of the elemental oxygens contained in the peroxy group. One of the oxygen atoms in each peroxide group is considered "active". The active oxygen is usually measured by titration methods but other methods can be used.

Active Oxygen (AO) Theoretical: the amount of oxygen contained in an organic peroxide molecule that is the theoretically maximum available for forming free radicals. This value is calculated from the number active oxygen based upon the chemical structure(s) of the organic peroxide(s) in the mixture.

Control Temperature (CT or T_c): the temperature an organic peroxide formulation must be at or below when offered for transport. If the shipped goods exceed this temperature corrective measures must be initiated to avoid reaching the emergency temperature.

Emergency Temperature (ET or T_e): the temperature at which emergency procedures shall be implemented during transportation of organic peroxide formulations.

Free Radical: atoms, molecules, or ions with unpaired electrons on an open shell configuration. Free radicals may have positive, negative, or zero charge. With some exceptions, the unpaired electrons cause radicals to be highly chemically reactive.

Half-life: Half-life is the time and temperature at which 50% of the peroxide will decompose.

HAST: Heat Accumulation Storage Test, a method of determining SADT.

OPPSD: The Organic Peroxide Producers Safety Division of ACC

Organic Peroxide: any organic chemical that contains an oxygen-oxygen (-O-O-) bond.

Organic Peroxide Formulation: a technically pure organic peroxide or a mixture of an organic peroxide with one or more materials, usually diluents.

RHDT: Rapid Heat Decomposition Temperature — the temperature at which a sample of an organic peroxide formulation visibly decomposes when heated rapidly.

References

1. ASTM E298, Standard Test Methods for Assay of Organic Peroxides, 2017, <http://www.astm.org/Standards/E298.htm>
2. Hazardous Materials Code 400 Storage of Organic Peroxide Formulations, 2022, National Fire Protection Association, Battery Park, Quincy, MA 02269. <https://www.nfpa.org/codes-and-standards/all-codes-and-standards/list-of-codes-and-standards/detail?code=400>
3. Recommendations on the Transport of Dangerous Goods, 19th revised. United Nations, New York, 2019. <https://unece.org/rev-21-2019>
4. American Chemistry Council, <http://www.americanchemistry.com>
5. The Organic Peroxide Producers Safety Division, <http://www.americanchemistry.com/OPPSD>
6. "Peroxides and Peroxide Compounds, Organic Peroxides", Kirk-Othmer Encyclopedia of Chemical Technology, 04 December 2000
7. Bundesanstalt für Materialprüfung (BAM), Unter den Eichen 87, 1000 Berlin 75, Federal Republic of Germany.
8. International Group of Experts on the Explosion Risks of Unstable Substances, Energetic and Oxidizing Substances, <http://www.igus-experts.org/eos.htm>
9. Pipeline and Hazardous Materials Safety Administration, <http://www.phmsa.dot.gov/home>
10. United Manual of Tests, and Criteria, 6th Edition, 2015, https://www.unece.org/fileadmin/DAM/trans/danger/ST_SG_AC.10_11_Rev6_E_WEB_-_With_corrections_from_Corr.1.pdf
11. Packaging requirements and other provisions for organic peroxides, Code of Federal Regulations, United States, Chapter 49, Section 173.225. https://www.ecfr.gov/cgi-bin/text-idx?SID=0d740216f400e4924d253f5693841f04&mc=true&node=se49.2.173_1225&rgn=div8
12. International Maritime Dangerous Goods, Code of International Maritime Organization, 2012.
13. International Air Transport Association, <http://www.iata.org/Pages/default.aspx>
14. Design Institute for Emergency Relief Systems, AIChE Industry Technology Alliance, <https://www.aiche.org/design-institute-emergency-relief-systems-diers>
15. An Example of a Test Method for Vent Sizing—OPPSD/PLASTICS Methodology, Process Safety Progress Journal, June 2002, 21, 2, June 2002.
16. Prins Maurits Laboratorium, Nederlandse Organisatie voor toegepast natuurwetenschappelijk onderzoek (TNO), Postbus 45, 2280 AA Rijswijk, Netherlands.
17. Organic Peroxide Spill Clean Up, OPPSD/ACC, 12/2022. <https://www.americanchemistry.com/content/download/5335/file/Liquid-Organic-Peroxide-Spill-Clean-Up.pdf>
18. Disposal of Liquid Organic Peroxides, OPPSD/ACC, 10/2021. <https://www.americanchemistry.com/content/download/5332/file/Disposal-of-Liquid-Organic-Peroxides.pdf>
19. Disposal of Solid Organic Peroxides, OPPSD/ACC, 10/2023. <https://www.americanchemistry.com/content/download/5331/file/Disposal-of-Solid-Organic-Peroxides.pdf>

References

20. Disposal of MEKP (Methyl Ethyl Ketone Peroxide), OPPSD/ACC, 10/2021.
<https://www.americanchemistry.com/content/download/5329/file/Methyl-Ethyl-Ketone-Peroxide.pdf>
21. Container Disposal, OPPSD/ACC, 10/2021.
<https://www.americanchemistry.com/content/download/5333/file/Container-Disposal.pdf>
22. Selection of Absorbents for Spills of Liquid Organic Peroxide Formulations. OPPSD/ACC, 11/2022.
<https://www.americanchemistry.com/content/download/12706/file/Selection-of-Absorbents-for-Spills-of-Liquid-Organic-Peroxide-Formulations.pdf>

This document is not intended to serve as legal rights or obligations. All persons involved in the responsible disposal of wastes and containers have an independent legal advice, a substitute for in-depth training or specific handling or storage requirements, nor is it designed or intended to define or create obligation to ascertain that their actions are in compliance with current federal, state and local laws and regulations and should consult with legal counsel concerning such matters. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

This work is protected by copyright. Users are granted a nonexclusive royalty-free license to reproduce and distribute this document, subject to the following limitations: (1) the work must be reproduced in its entirety, without alterations; and (2) copies of the work may not be sold.